



## SPECIFICATIONS

(Typical values stored at 20°C for one year)

- ◆ Nominal capacity 1.2Ah  
(at 1mA/20°C/68°F/2.0V cut-off)
- ◆ Nominal voltage 3.6V
- ◆ Max. recommended continuous current ★ 50mA  
(Higher current can be available upon consulting)
- ◆ Max. pulse current capability ★ 100mA
- ◆ Operating temperature range -55 ~+85°C
- ◆ Case ABS AF366F, UL94 V-0 FR
- ◆ Lithium metal content approx. 0.3g
- ◆ Weight / Volume 9g / 4.3cm<sup>3</sup>
- ◆ UL Approval MH28122

**Max Recommended Continuous Current:** Continuous current permitting 15% of the nominal capacity to be achieved at +20°C with 2.0V cut off.

**Max Pulse Current Capability:** Maximum Pulse capability reading over 3.0V at 100mA/0.1sec. every 2 min. at +20°C, 1mA / cm<sup>2</sup> base current with fresh batteries.

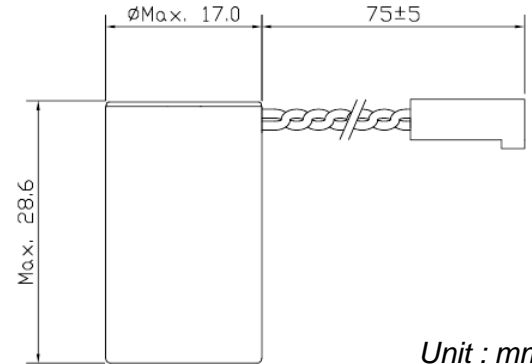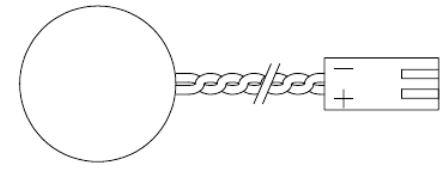

Unit : mm

### Storage Condition

Please store batteries at clean, cool (not over +30°C), dry and ventilated condition

